

## GRUPPO INCASSO

### Versiune

Incorporat 50 cm - 800 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122353395



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

**Inox AISI 304 Scotch Brite**  
**Aspiratie perimetrala**  
**Control electronic**  
**Filtru de grasime metalic,**  
**detasabil si lavabil**  
**Filtru de carbon inclus**  
**Optional - telecomanda**  
**Dynamic LED Light (2700K -**  
**5600K)**

## ACCESORII OPTIONALE

### KACL.815

Lavete pentru curatare inox (cutie 10 buc)

### 105080053

Telecomanda

### KACL.798#41F

Motor de acoperis 950 m<sup>3</sup>/h

### KACL.770#41F

Motor de acoperis 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Motor de exterior 1000 m<sup>3</sup>/h


### KACL.796#4AF

Motor de exterior 1500 m<sup>3</sup>/h

### KACL.797#4AF

Motor de acoperis 1300 m<sup>3</sup>/h

Cut-out size: 505 x 262 mm

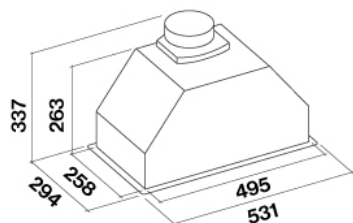

## CARACTERISTICI TEHNICE

### Tip de instalare

Incorporata

### Dimensiuni

50 cm

### Finisaj

Inox Scotch Brite (AISI 304)

### Motor

800 m<sup>3</sup>/h

### Tipul panoului de control

Control electronic

### Setari de viteza

4

### Iluminare

Led 2x1,2 W - 2700 K / 5600 K

### Filtru

Filtru metalic "Base" - 204x207 mm - 2 pz

### Filtru de Carbon

Filtru de carbon rotund Ø170 mm - Tip 6

### Distanta minima

Plita cu gaz: 62 cm

Plita electrica: 52 cm

## AMBALARE: GREUTATE SI VOLUM

### Greutate bruta

12.00 kg

### Greutate neta

10.00 kg

### Volume

0.08 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

610 mm

Inaltime

375 mm

Adancime

350 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Consum maxim

280 W

### Curent

220-240V

### Frecventa

50-60Hz

### Tip stecher

Shuko

## FISA TEHNICA MOTOR

### Capacitate maxima

670 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)

500 Pa

### Putere maxima motor

215 W

### CLASA DE ENERGIE

B

## GRUPPO INCASSO

### Versiune

Incorporat 50 cm - 800 m<sup>3</sup>/h

### Colectie

Design


### Cod EAN

8034122353395

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacitate (m <sup>3</sup> /h) I.E.C.61591 Tubulatura	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

## CAPACITATE/ PRESIUNE

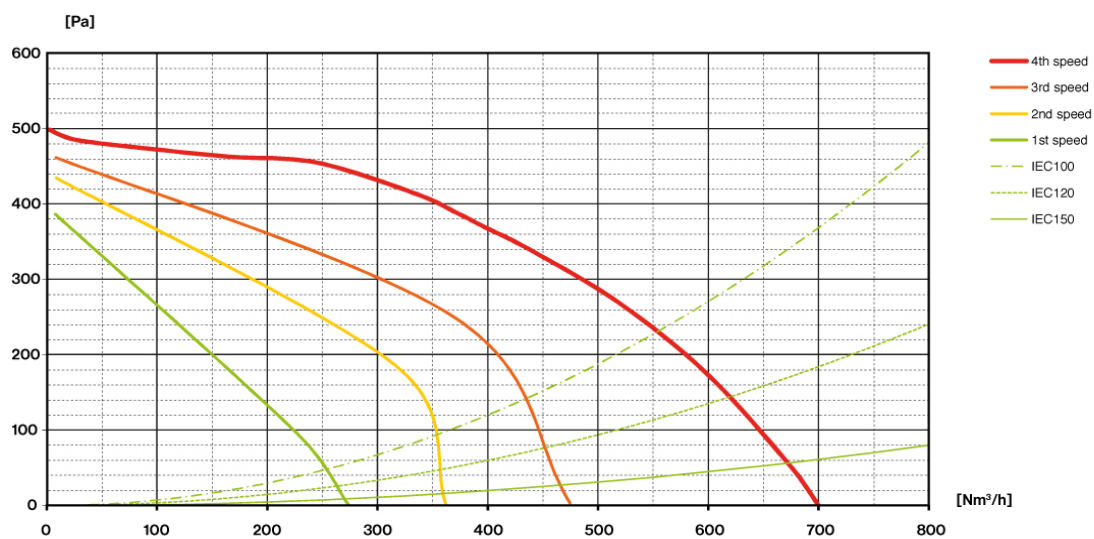

## GRUPPO INCASSO

### Versiune

Incorporat 50 cm - 800 m<sup>3</sup>/h


### Colectie

Design

### Cod EAN

8034122353395

## ETICHETA DE ENERGIE

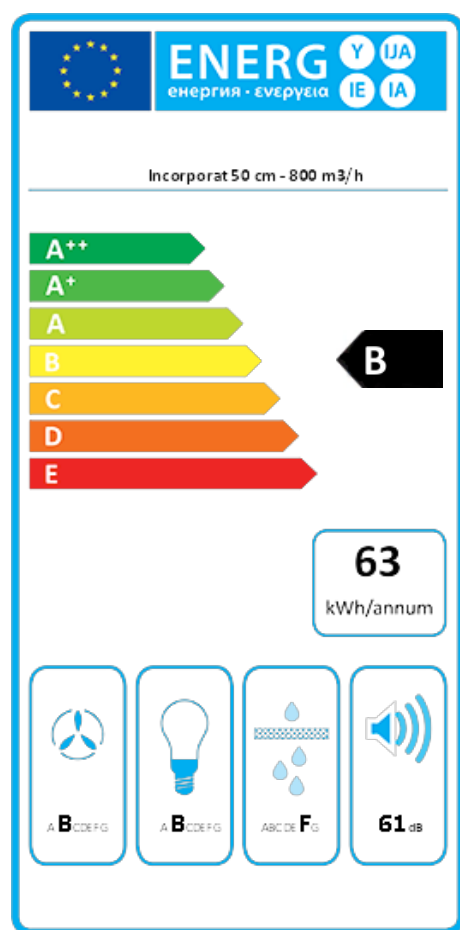

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Incorporat 50 cm - 800 m <sup>3</sup> /h	
<b>AEC</b>	63,2	kWh/a
<b>ECC</b>	B	
<b>FDE</b>	25,5	
<b>FDEC</b>	B	
<b>LE</b>	27,9	
<b>LEC</b>	B	
<b>GFE</b>	53,0	
<b>GFEC</b>	F	
<b>Qmin</b>	270,0	m <sup>3</sup> /h
<b>Qmax</b>	470,0	m <sup>3</sup> /h
<b>Qboost</b>	670,0	m <sup>3</sup> /h
<b>SPEmin</b>	49	dBa
<b>SPEmax</b>	61	dBa
<b>SPEboost</b>	67	dBa
<b>PO</b>	-	W
<b>PS</b>	0,48	W
PI		
<b>F</b>	1,1	
<b>EEl</b>	63,5	
<b>Qbep</b>	333,0	m <sup>3</sup> /h
<b>Pbep</b>	407	Pa
<b>Qboost</b>	670,0	m <sup>3</sup> /h
<b>Wbep</b>	147,7	W
<b>WL</b>	5,30	W
<b>Emiddle</b>	148	lex
<b>Lwa-SPEmax</b>	61	dBa