

FLIPPER NRS

Versiune

Perete 85 cm - Negru - 800 m³/h

Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122353739

CARACTERISTICI

Tehnologie NRS pentru liniste in bucatarie

Control electronic

Iluminare cu LED

Filtru de grasime metalic, detasabil si lavabil

Optional - filtru de carbon
Sticla tratata termic culoare neagra cu banda centrala FASTEEL

ACCESORII OPTIONALE

KACL.570#I

Extensie H700 - Perete

KACL.571#I

Extensie H960 - Perete

KACL.400

Silentios / Conveier NRS

101078897

Filtru de inalta performanta

CARACTERISTICI TEHNICE

Tip de instalare

De perete

Dimensiuni

85 cm

Finisaj

Sticla tratata termic culoare neagra cu banda centrala FASTEEL

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

LED 2x1,2 W - 3200 K

Filtru

Filtru metalic "Base" - 284x234 mm - 2 pz

Filtru de Carbon

Filtru de inalta performanta

Distanta minima

Plita cu gaz: 52 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

47.00 kg

Greutate neta

40.00 kg

Volume

0.69 m³

Dimensiuni ambalaj

Lungime

1030 mm

Inaltime

975 mm

Adancime

685 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

610 m³/h

I.E.C. 61591

Nivel de zgomot maxim

54,5 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


510 Pa

Putere maxima motor

224 W

CLASA DE ENERGIE

B



FLIPPER NRS

Versiune

Perete 85 cm - Negru - 800 m³/h

Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122353739

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacitate (m3/h) I.E.C.61591 Tubulatura	220	290	375	610
Presiune maxima (Pa)	390	440	490	510
Putere motor (W)	130	150	178	224
Evacuare aer	150	150	150	150

FLIPPER NRS

Versiune

Perete 85 cm - Negru - 800 m³/h


Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122353739

ETICHETA DE ENERGIE

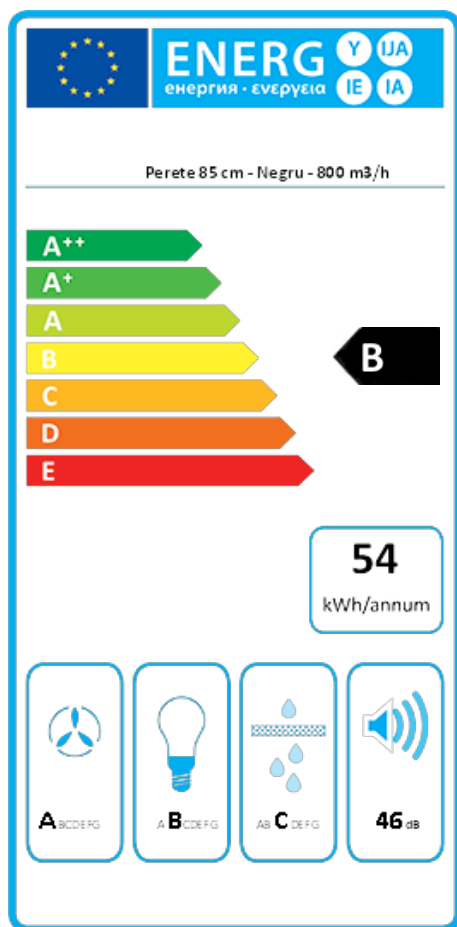

PF		
S	Falmec Spa	
M	Perete 85 cm - Negru - 800 m ³ /h	
AEC	53,9	kWh/a
ECC	B	
FDE	28,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	57,6	
Qbep	356,0	m ³ /h
Pbep	392	Pa
Qboost	610,0	m ³ /h
Wbep	137,0	W
WL	5,10	W
Emiddle	114	lex
Lwa-SPEmax	46	dBa