



I-960

Inox - Stainless steel

Motor Interior S.E.C. System®

Moteur Intérieur / Interior Motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
100	V.1250 eco	Ø150	A+	9518

Motor Intermedio Exterior

Moteur Deporté / Duct-in-line remote motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
100	V.1550 eco	Ø150	A+	9519

Cristal negro - Verre noir - Black glass

Motor Interior S.E.C. System®

Moteur Intérieur / Interior Motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
100	V.1250 eco	Ø150	A+	9522

Motor Intermedio Exterior

Moteur Deporté / Duct-in-line remote motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
100	V.1550 eco	Ø150	A+	9523

Cristal blanco - Verre blanc - White glass

Motor Interior S.E.C. System®

Moteur Intérieur / Interior Motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
100	V.1250 eco	Ø150	A+	9520

Motor Intermedio Exterior

Moteur Deporté / Duct-in-line remote motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
100	V.1550 eco	Ø150	A+	9521

Opcionales / Optionnel / Options

Embellecedor a techo. Ref. 7116.
Enjoliveur de plafond. Réf. 7116.
Ceiling trim. Ref. 7116.

Soporte falso techo regulable de 150 a 240 mm. Ref. 7972.
Support faux plafond réglable de 150 à 240 mm. Réf. 7972.
False ceiling support adjustable from 150 to 240 mm. Ref. 7972.

Soporte falso techo regulable de 250 a 440 mm. Ref. 7973.
Support faux plafond réglable de 250 à 440 mm. Réf. 7973.
False ceiling support adjustable from 250 to 440 mm. Ref. 7973.

Mando a distancia Touch. Suministrado con la campana
Télécommande Touch.
Touch remote control.

Kits de recirculación FCA. Ver página 205
KIT filtres à charbon actif. Voir page 205
Activated carbon filters kits. See page 205


Notas / Notes / Notes

Apto sólo para encimeras de máximo 900 x 350 mm.
Valable seulement pour les plans de cuisson aux dimensions maximales de 900 x 350 mm.
Suitable only for hobs of a maximum of 900 x 350 mm.

Opción de cambio de led original a led de luz cálida de 3000K.
Suministrado con la campana.

Option de substitution du led d'origine par un led à lumière chaude de 3000 K (*) – Changement optionnel possible uniquement en usine.

Option of changing the original LED for a 3000K (*) warm light LED – Optional change only possible in factory.

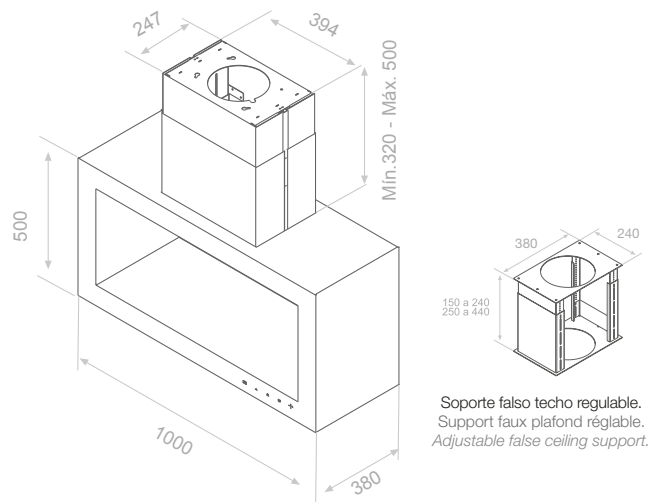

Soporte falso techo regulable.
Support faux plafond réglable.
Adjustable false ceiling support.

Opcionales / Optionnel / Options

Juego de tubos + estructura hasta altura total de 1500 mm
Ensemble de tubes jusqu'à une hauteur totale de 1500 mm
Set of flue pipes to a total height of 1500 mm

Juego de tubos + estructura hasta altura total de entre 1501 y 2000 mm
Ensemble de tubes jusqu'à une hauteur totale comprise entre 1501 et 2000 mm
Set of flue pipes to a total height of between 1501 and 2000 mm

Bajo presupuesto / Sur devis / On request

Mando a distancia Touch. Suministrado en pedido al margen de la campana.
Télécommande Touch. Fourni sur commande indépendamment de la hotte.
Touch remote control. Supplied on request independent from the hood.



Isla / Ilot / Island

Inox - Stainless steel

100 cm  |  |  |  |  |  |  |  |  | 

Mod. Inox
Stainless steel | 