



Color Variants

CM450112
Stainless steel behind glass-backed full glass door
Width 60 cm

Included accessories

- 1 x assembly screws.
- 1 x scoop.
- 1 x test strip.
- 1 x milk container (insulated).
- 1 x connection hose for milk frother.
- 1 x milk pipe.

CM450112
Fully automatic espresso machine 400 series
Stainless steel behind glass-backed full glass door
Width 60 cm

Controls at the top
Handleless door / automatic door opening
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalisation function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

- Ristretto / 2 x Ristretto.
- Espresso / 2 x Espresso. Espresso Macchiato / 2 x Espresso Macchiato.
- Coffee / 2 x Coffee. Americano / 2 x Americano. Caffè Latte / 2 x Caffè Latte. Latte Macchiato / 2 x Latte Macchiato. Cappuccino / 2 x Cappuccino. Flat White / 2 x Flat White. Milk froth / 2 x Milk froth. Warm milk / 2 x Warm milk. Hot water / 2 x Hot water.

Handling

- Automatic door opening.
- Rotary knob and TFT touch display operation.
- Clear text display.
- Personalisation function, option to save 8 individualised beverages.
- 4 beverage size settings, volume can be individually adjusted to match the size of the cup.
- 8 coffee strength levels from very mild to extra strong.
- 3 coffee temperature levels.
- 10 hot water temperature levels.
- 4 coffee-milk ratio levels.
- Adjustable grinding level.
- Height-adjustable coffee dispenser 7 cm to 15 cm.
- Easy access to water tank, milk and coffee bean container behind the door.

Features

- Maintenance-free grinding unit with ceramic discs.
- Separate drawer for second ground coffee type.
- Water pump with 19 bar pressure.
- Double grinding and brewing cycles for extra intensity for single beverage order.
- For double beverage order, two grinding and brewing cycles.
- Beverage dispenser with integrated milk system.
- Insulated stainless steel milk container for up to 0.5 litres.
- Integrated lighting with LEDs.
- Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
- Automatic adjustment of ground coffee quantity.
- Removable 2.4 litre water tank.
- Electronic water filter exchange indicator.
- Electronic fill level control for drip tray and container for coffee residue.

Characteristics
Built-in / Free-standing
Built-in
Net weight
23.0
Gross weight
25.6
Dimensions (HxWxD)
455 x 590 x 444
Dimensions of the packed product (HxWxD)
540 x 478 x 670
Required niche size for installation (HxWxD)
449 x 558 x 347
EAN code
4242006278687
Electrical connection rating
Fuse protection
10
Voltage
220-240
Frequency
50/60
Length electrical supply cord
170.0

Consumption and connection features

2023-01-18
Page 1

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Child lock.

Cleaning


- Fully automatic rinse program when machine is turned on/off.
- Automatic steam cleaning of the milk system after every beverage.
- Automatic cleaning and descaling program.
- Emptying program to prepare the appliance for holiday or transportation.
- Empty grinding function to remove coffee residues from the system when switching bean types.
- Removable brewing unit.
- Dishwasher-safe coffee residue container and drip tray.
- Dishwasher-safe beverage dispenser.

Planning notes


- Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
- The door panel surface of the appliance extends 47 mm from the furniture cavity.
- When installing in a corner a side clearance is required.
- Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
- Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
- Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
- Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
- The LAN port can be found at the back on the lower right side.
- Special accessories (order as spare parts):
Part No. 17000705 Water filter Part No. 00311819 Descaling tablets Part No. 00311769 Cleaning tablets Part No. 00636455 Door hinge restrictor (92° opening angle) Part No. 11015223 Bean container with lid

Connection

- Total connected load 1.6 KW.
- Connection cable 1.7 m with plug.
- Plan a LAN cable.
- Power consumption standby/display off 0.5 W.
- Power consumption standby/network 2.0 W.
- Time auto-standby/display on 30 min.
- Time auto-standby/network 30 min.
- Please check the user manual for how to switch off the WiFi module.

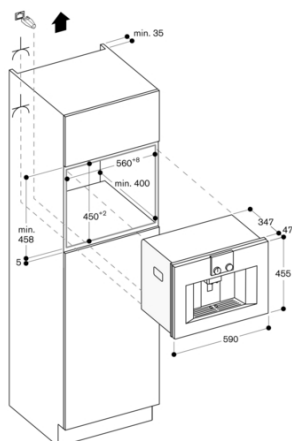

Left corner installation

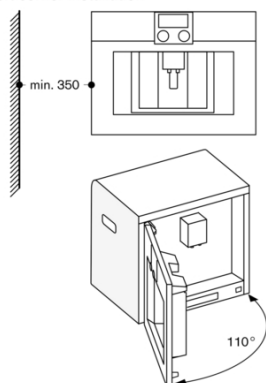

If using the 92° door hinge restrictor (spare part no. 00636455),
the minimum distance from the wall is only 100 mm.