

GRUPPO INCASSO NRS

Versiune

Incorporat 50 cm - 800 m³/h

Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122343105



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox AISI 304 Scotch Brite
Tehnologie NRS pentru liniste in bucatarie
Control electronic
Iluminare cu LED
Filtru de grasime Top, detasabil si lavabil
Optional - filtru de carbon
Telecomanda inclusa
Dynamic LED Light (2700K - 5600K)

ACCESORII OPTIONALE

KACL.920

Filtru de inalta performanta

KACL.815

Lavete pentru curatare inox (cutie 10 buc)

KACL.400

Silentios / Conveier NRS

CARACTERISTICI TEHNICE

Tip de instalare

Incorporata

Dimensiuni

50 cm

Finisaj

Inox Scotch Brite (AISI 304)

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

LED 2x1,2 W - 3200 K

Filtru

Top - Gr. Incasso NRS / 50 cm - 2 pz

Filtru de Carbon

Filtru de inalta performanta

Distanta minima

Plita cu gaz: 57 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

31.00 kg

Greutate neta

26.00 kg

Volume

0.32 m³

Dimensiuni ambalaj

Lungime

1035 mm

Inaltime

740 mm

Adancime

420 mm

FISA TEHNICA MOTOR

Capacitate maxima

610 m³/h

I.E.C. 61591

Nivel de zgomot maxim

54,5 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)

510 Pa

Putere maxima motor

224 W

CLASA DE ENERGIE

B

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent


220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

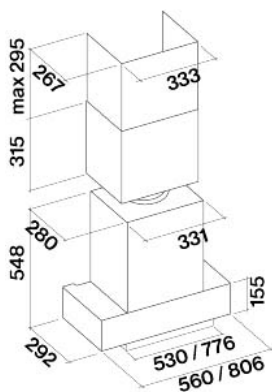

GRUPPO INCASSO NRS

Versiune

Incorporat 50 cm - 800 m³/h

Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122343105

FISA TEHNICA MOTOR

| Viteza motorului | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|------|
| Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13 | 37 | 41 | 46 | 54,5 |
| Capacitate (m3/h) I.E.C.61591 Tubulatura | 220 | 290 | 375 | 610 |
| Presiune maxima (Pa) | 390 | 440 | 490 | 510 |
| Putere motor (W) | 130 | 150 | 178 | 224 |
| Evacuare aer | 150 | 150 | 150 | 150 |

GRUPPO INCASSO NRS

Versiune

Incorporat 50 cm - 800 m³/h


Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122343105

ETICHETA DE ENERGIE

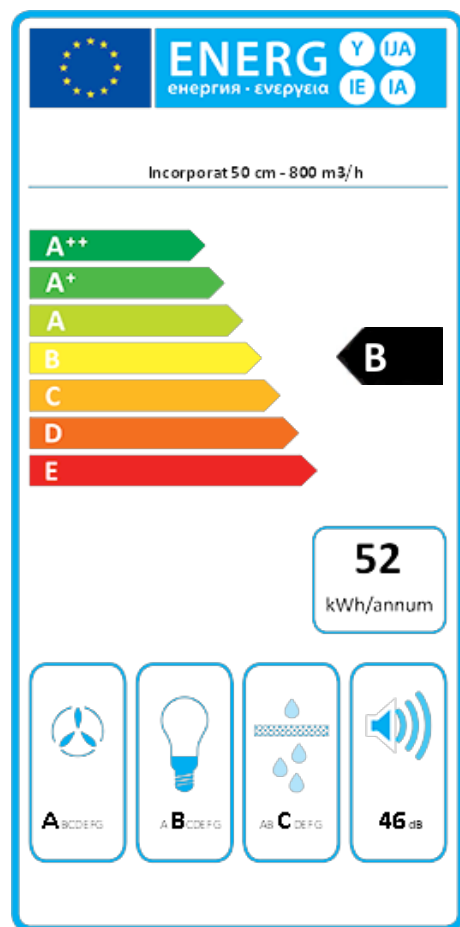

| PF | | |
|-------------------|--|-------------------|
| S | Falmec Spa | |
| M | Incorporat 50 cm - 800 m ³ /h | |
| AEC | 51,7 | kWh/a |
| ECC | B | |
| FDE | 28,9 | |
| FDEC | A | |
| LE | 20,5 | |
| LEC | B | |
| GFE | 80,0 | |
| GFEC | C | |
| Qmin | 220,0 | m ³ /h |
| Qmax | 375,0 | m ³ /h |
| Qboost | 610,0 | m ³ /h |
| SPEmin | 37 | dBa |
| SPEmax | 46 | dBa |
| SPEboost | 55 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1,0 | |
| EEl | 57,3 | |
| Qbep | 369,0 | m ³ /h |
| Pbep | 369 | Pa |
| Qboost | 610,0 | m ³ /h |
| Wbep | 131,0 | W |
| WL | 5,30 | W |
| Emiddle | 109 | lex |
| Lwa-SPEmax | 46 | dBa |