

POLAR LIGHT

Versiune

Insula 35 cm - 800 m³/h

Colectie

Design+

Cod EAN

8034122331812



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox AISI 304 Scotch Brite
Control electronic
Iluminare ambientala cu LED
Iluminare cu LED
Filtru de grasime Top, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.815

Lavete pentru curatare inox (cutie 10 buc)

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

CARACTERISTICI TEHNICE

Tip de instalare

Insula

Dimensiuni

35 cm

Finisaj

Inox Scotch Brite (AISI 304)

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

LED 3x1,2 W - 3200 K

Lumina ambientala

Banda cu LED 5 W

Filtru de Carbon

Filtru de carbon rotund Ø170 mm -
Tip 6 - inclus

Distanta minima

Plita cu gaz: 60 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

29.00 kg

Greutate neta

24.00 kg

Volume

0.3 m³

Dimensiuni ambalaj

Lungime

995 mm

Inaltime

595 mm

Adancime

500 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

710 m³/h

I.E.C. 61591

Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

215 W

CLASA DE ENERGIE

B



POLAR LIGHT

Versiune

Insula 35 cm - 800 m³/h

Colectie

Design+


Cod EAN

8034122331812

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	48	54	61	67
Capacitate (m ³ /h) I.E.C.61591 Tubulatura	290	380	490	710
Presiune maxima (Pa)	400	450	480	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

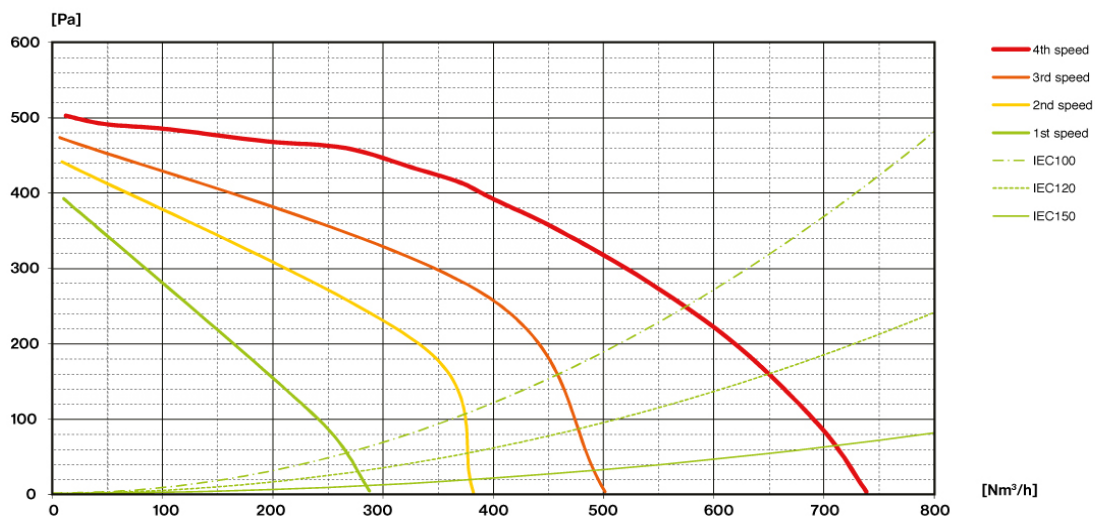

POLAR LIGHT

Versiune

Insula 35 cm - 800 m³/h


Colectie

Design+

Cod EAN

8034122331812

ETICHETA DE ENERGIE

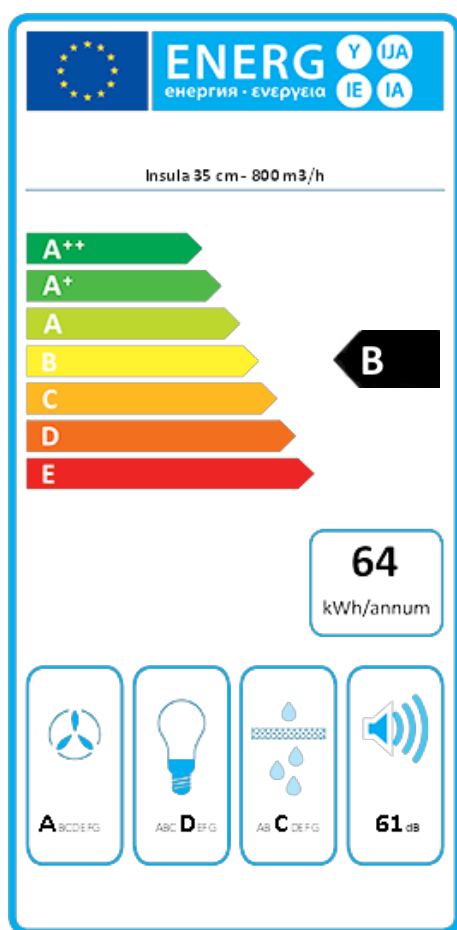

PF		
S	Falmec Spa	
M	Insula 35 cm - 800 m ³ /h	
AEC	63,9	kWh/a
ECC	B	
FDE	28,1	
FDEC	A	
LE	13,7	
LEC	D	
GFE	76,0	
GFEC	C	
Qmin	290,0	m ³ /h
Qmax	490,0	m ³ /h
Qboost	710,0	m ³ /h
SPEmin	48	dBa
SPEmax	61	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	60,9	
Qbep	371,0	m ³ /h
Pbep	412	Pa
Qboost	710,0	m ³ /h
Wbep	151,0	W
WL	12,00	W
Emiddle	165	lex
Lwa-SPEmax	61	dBa